
AMETRIX™

Remote



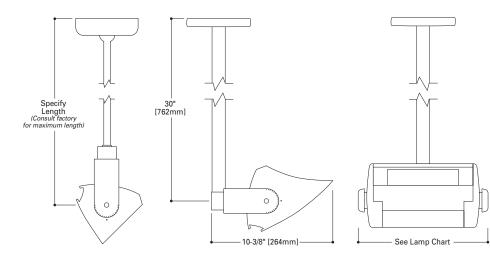

Vault

SMALL

LAMP CHART - Remote

SOURCE	WATTAGE	LENGTH	
Tungsten	100	10-3/4"	
	150	13"	
	250	13"	
Metal Halide	39	10-3/4"	
	70	13"	
	150	13"	
Fluorescent	26	13"	

ORDERING INFORMATION

SAMPLE NUMBER: VN-SI-P-1-T150-120-W-P2R30

Product	Size - Indoor	Lens	No. of Lamps	Lamp/Ballast Type	Wattage
□ VN Vault No Visor □ VS Vault Solid Visor □ V0 Vault Opal Visor □ VP Vault Square Perf Visor	□ SI Small Indoor	C Clear P Micro-prismatic U.V.* None**	□ 1 1 Lamp	Fluorescent (Electronic) Tungsten Halogen E Metal Halide* (Electronic) Motal Halide (Magnetic)	□ 026 26W (F) □ 039 39W (E, M) □ 070 70W (E, M) □ 100 100W (T) □ 150 150W (E, M, T) □ 250 250W (T)
Voltage	Finish	Mounting		Modification	Accessories
□ 120 120V (T) □ 277 277V □ 347 347V	□ W White □ S Silver □ B Bronze □ C Custom (Consult factory)	PP12 Pendant 12"/Remote PP18 Pendant 18"/Remote PP24 Pendant 24"/Remote PP30 Pendant 30"/Remote 12"/Remote PS12 Pendant Swivel 12"/Remote PS18 Pendant Swivel 18"/Remote PS24 Pendant Swivel 24"/Remote PS24 Pendant Swivel 24"/Remote PS30 Pendant Swivel 30"/Remote	□ P1R30 Uplight Pendant 30"/Remote □ P2R30 Two Uplight Pendant 30"/Remote □ P4R30 Four Uplight Pendant 30"/Remote	MOD Provide description of the modification. (Consult factory)	L45 45° Cross Blade Louver L25 25° Cross Blade Louver Specifications and dimensions subject to change without notice. * Not available with all sources or options. (Consult factory) ** Only available for fluorescent option.

- Extruded aluminum housing
- Die-cast aluminum end caps
- Integrated visor option solid, perf or opal window
- Die-formed 94% reflective dual-finish anodized aluminum reflector
- Gasketed hinging doorframe indoor toolless entry
- PointGrab™ adjustment